


# FLEXIBULK SHIPPING

by  **N.V. CARGO**

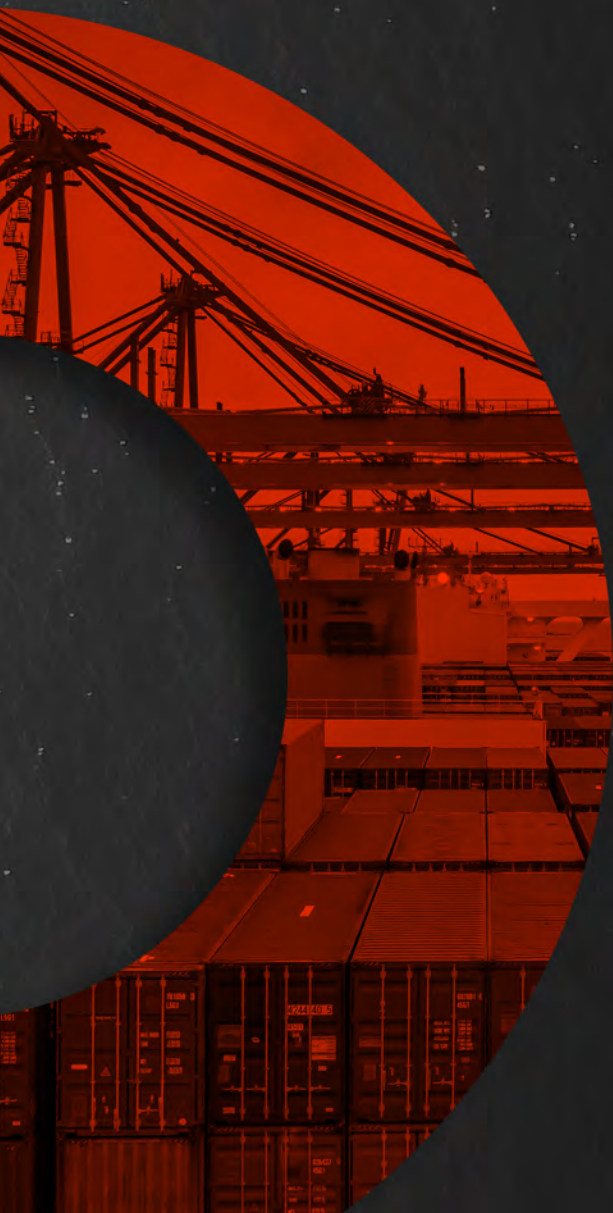

# Catalog

**FLEXIBULK SHIPPING**  
by  **N.V. CARGO**



# Who We Are

Flexibulk Shipping by N.V. Cargo offers a standout solution in the transportation of a wide range of bulk liquid cargoes, such as oils, wines, juices, and more, under the umbrella of N.V. Cargo Logistics. This subdivision specializes in the careful and efficient handling of products, using containers specifically designed to preserve the quality and integrity of the load during transport.

Opting for Flexibulk Shipping means choosing smooth and reliable logistics that not only optimize costs and delivery times but also ensure customer satisfaction and commercial success. Thanks to its commitment to excellence and innovation, Flexibulk establishes itself as the ideal partner to meet the transportation needs of bulk liquid cargo, highlighting its ability to guarantee high-quality service.

**FLEXIBULK SHIPPING**

by  **N.V. CARGO**



# Products That Can Be Transported

*Additives*

*Juices, fruit purees  
& derivatives*

*Vinegar*

*Vegetable Oil*

*Wines, musts,  
and spirits*

# Flexitank Specifications

Flexitank Parameters	
Structure	1 layer PP+4 layers PE
Capacity	24,000 liters
PP (Food Grade) Valve	3" ball vales for load & unload
PP woven fabric	180GSM
Tensile strength :MD(ASTM D638IV at 50 mm)	2016N
Tensile strength :TD(ASTM D638IV at 50 mm)	2124N
PE film Description	Typical Characteristics
Four-ply Co-extrusion Polyethylene layer	125 microns each ply
Tensile strength :MD(ASTM D638IV at 50 mm)	≥30Mpa
Tensile strength: TD(ASTM D638V at 50 mm)	≥32Mpa
Tear Resistance :MD(ASTM D1004)	≥120N/MM
Tear Resistance :TD(ASTM D1004)	≥115N/MM
Puncture Resistance:(ASTM D4833)	≥1400G
Elongation MD(ASTM D638IV at 50 mm)	≥700%
Elongation TD(ASTM D638V at 50 mm)	≥750%
Oxygen Transfer (ASTM 3985)	Less than lcc/100sq.in/day
Moisture Transfer(perms)(ASTMF 1249)	0.3G/m2/day
Temperature Bearing	10 - 85 centigrade available
Safety lock Sewing	Sewing thread: 4000D
Packing carton size:	103x51x40cm
Gross weight	45kg



# Flexitank Specifications

Basic Info.			
Model NO.	24000L	Application	Oil, Industrial Alcohol, Alkali, Industrial Wastewater, Water, Food, Promotion, Household, Chemical, Apparel
Material	PP	TYPE	Enclosed
Valve	3" Diameters	PE Thickness	130&250 Microns
PP+PE	1+4	Certificate	SGS Food Grade Packaging
Weight	50kg	Transport Package	Compression Packing
Specification	590*240*170cm or as Request	Trademark	Flexitank
Packaging & Delivery			
Package Size	53.00cm * 105.00cm * 42.00cm		
Package Gross Weight	50.000kg		



# Installation Process


- **Container Selection:** Choose a container that meets the specifications (see the note on the top cover of the flexitank box). Clean the inside of the container, making sure to remove any hard and sharp objects.
- **Container Preparation:** Roll out corrugated paper inside the container to prevent leaks, securing it with adhesive tape.
- **Flexitank Deployment:** Extend the flexitank as shown in the pictures, lifting all four corners to ensure the folded parts are symmetrical.
- **Flexitank and Paper Tubes Installation:** Take out the flexitank and paper tubes, place the first extension tube and secure the locking pin. Place the steel tube as indicated in the image.
- **Bulkhead Installation:** Install the bulkhead and secure it with cable ties. Install the valve locking card, paying attention to the direction of the valve bulkhead.



# Advantages of the FlexiBag

FlexiBags from FlexiBulk Shipping by N.V. Cargo offer an efficient and safe solution for the transportation of bulk liquids, standing out for:

- **Space Efficiency:** They maximize the use of container space, increasing the amount of product transported.
- **Reduced Costs:** They lower transportation costs thanks to their lightweight design and optimized load capacity.
- **Product Protection:** Made with high-quality materials, they protect against contamination and preserve the integrity of the product.
- **Safety:** They minimize the risk of leaks, ensuring safety during transport.
- **Sustainability:** They contribute to a lower carbon footprint compared to traditional methods.
- **Ease of Use:** Designed for simple installation and handling, they facilitate logistical operations.

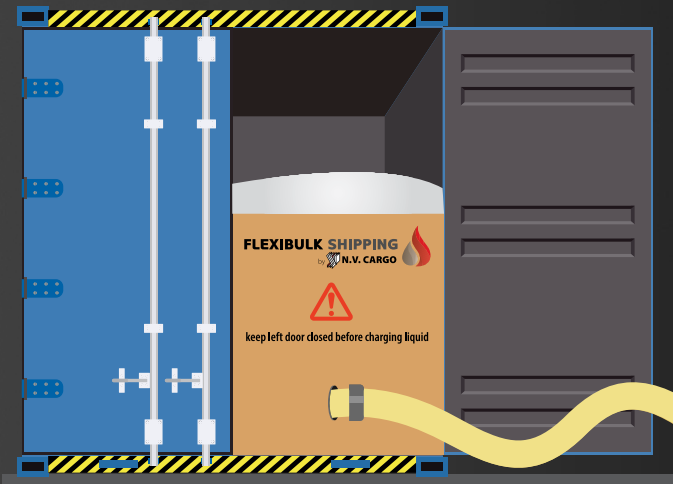



# Contact Information

## Office Address:

10th Floor, Banistmo Tower, Alquilino de la Guardia St.,  
Suite 1026, Marbella, Panama City

## Warehouse Address:

Parque Sur, Tocumen, Flex 2 Building, Warehouses 9-13, Panamá,  
Panama Province

## Contact:

Office: 507 282 1335

Mobile: +507 6398 6040

Fax: +1 (305) 459-1198

Email: [Janibeth@nvcargologistics.com](mailto:Janibeth@nvcargologistics.com)

*Customized liquid cargo transportation  
solutions tailored to your needs.*

**FLEXIBULK SHIPPING**



by

**N.V. CARGO**



[www.nvcargologistics.com](http://www.nvcargologistics.com)